

Kelin a base de agua epoxi adhesivo es un producto del medio ambiente de alta gama. Y somos un proveedor de adhesivo para baldosas con fuerte resistencia global. Textura mate, que ofrece un estilo decorativo de lujo de bajo perfil, y la superficie de la articulación se ve ajuste perfecto a la baldosa cerámica. Variedades de colores, permiten su lugar la decoración con gas. El curso subbase de resina epoxi a base de agua hace que el producto absolutamente ambiental. arena natural calcinada a alta temperatura hace que el color más natural y hermoso y nunca se desvanece.

El producto puede ser mejor utilizado en las juntas de baldosas de cerámica, piedra, vidrio, baldosas de mosaico en la pared o la harina en el baño, cocina, dormitorio y así sucesivamente. Es un producto de preferencia en decoración de la familia, la adición de ion negativo del oxígeno al aire de purificar. Australia conjuntos de investigación y desarrollo de productos para hacer el mejor rendimiento, ya través de la Academia China de Ciencias de la orientación estratégica de control de calidad, para hacer estable la calidad de los productos. Bienvenido a nosotros, contactos [De China lechada de relleno s upplier](#) cooperación.



**Variedades de colores para su opción. También proporciona los colores personalizados.**

Gray 1#

Gray 2#

Gray 3#

Gray 4#

Gray 5#

Gray 6#

Gray 7#

Gray 8#

Gray 9#

Cement Gray

Dull Gray

Silver Gray

Metal Gray

Luxury Silver

Glacier White

Calaeatta

Pearl Gold

Slate Gray

Terra Brown

Greyish Green

Yellow Gray

Soft Khaki

Yellowish Brown

Olive Brown

Brownness

Dark Brown

Reddish Brown

Rock Bslack



Proporcionar Total Solution Gap habitación



## Breve proceso de construcción



01  
Clean the tiles and keep it dry



02  
Polish with tile wax except the glazed tile



03  
Open & Watch, both sides can extruded meanwhile



04  
Screw on the nozzle, put on the grout gun



05  
Inclined cut the top of the nozzle in 45°



06  
Squeeze out 60-80cm long grout in the forefront



07  
Evenly squeeze out the tile agent along the gap



08  
Press the grout with professional glue-press tools



09  
Don't touch in 4-5 hours and remove excess grout then.



10  
Keep the tiles dry in 24 hours

### Profesional Joint-herramienta de presión



Cutter Knife



Pointing trowel



Brush



Rainbow Scraper



Stirring Knife




The sponge



Scouring Pad

### Ventaja de la empresa

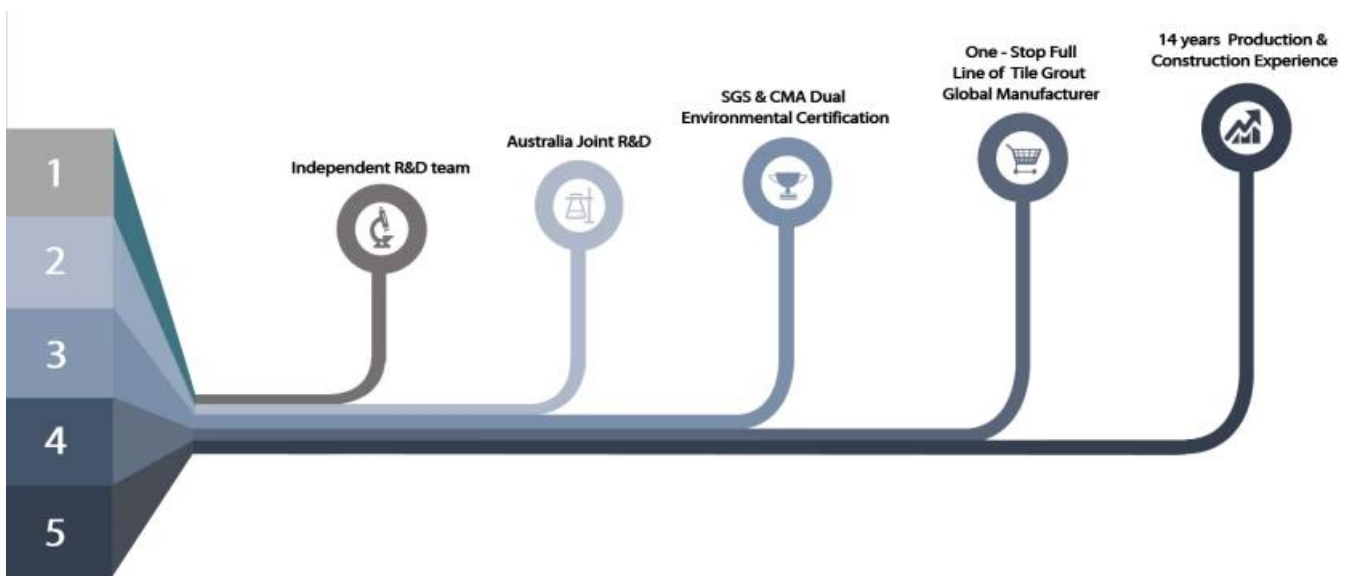

## Visión general de la fábrica



Creaming Machine Line



Testing Machine



Batching Production Line



Cooling Filling



Filling Machine Line



Film-coated Machine



Real Material Stock



Stock

## Certificación

